



## TD

### HYDRAULIC REACH MOWERS



TDR version for reversible drive



Floating head system




Front guard



Adjustable rear roller



30° max

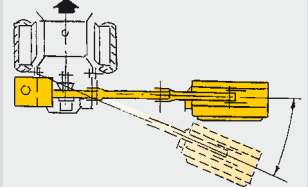

Mechanical breakaway



Oil cooler with thermostat (option)




Cable controls




Monolever electric control



HP Tractor		40	50	60	70	Min. tractor weight Kg	Min. tractor width m
TD37						1700	1,50
TD42						2000	1,70

#### Working positions (m)

		TD 37	TD 42
A	m	3,70	4,23
B	m	3,96	4,53
C	m	2,03	2,41
D	m	2,28	2,86
E	m	3,19	3,77
I	m	1,62	1,78
L	m	0,88	1,00
M	m	1,69	2,00
N	m	1,55	1,54
O	m	2,05	2,33
P	m	1,25	1,27
Z	m	0,72	0,72

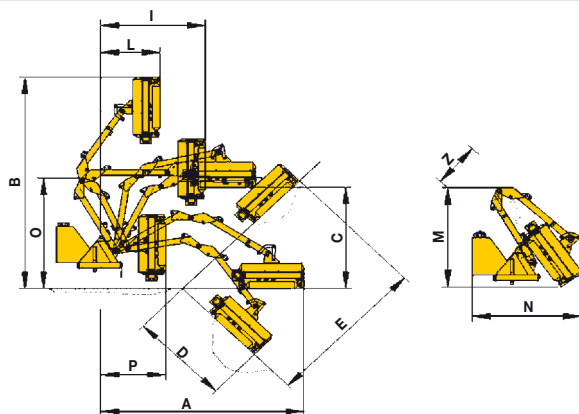

## Technical data

Model	Max horizontal reach*	Weight	Articulated "Y" blades	Oil	Rotor	P.t.o. MAX rpm	Flail head angle
	m	Kg	n.	l	rpm		
TD37 - TDR37	3,70	440	40	74	3.000	540	190°
TD42 - TDR42	4,23	455	40	74	3.000	540	190°

\* Reach measured from tractor centre line to head edge.

### Machines with cable controls "Classic"

#### Model

TD37 Classic with TIL100 flail head m 1,00

TD42 Classic with TIL100 flail head m 1,00

#### Version for tractors with reversible drive

TDR37 Classic with TIL100 flail head m 1,00

TDR42 Classic with TIL100 flail head m 1,00

### Machines with electric controls "Electra"

#### Model

TD37 Electra with TIL100 flail head m 1,00

TD42 Electra with TIL100 flail head m 1,00

#### Version for tractors with reversible drive

TDR37 Electra with TIL100 flail head m 1,00

TDR42 Electra with TIL100 flail head m 1,00

### Option

Stabilizers to the tractor (code TD36float01)

"Delta yoke" for stabilizer (code TD3703)

Stabilizer for "Delta yoke" (code TD3704)

Oil cooler with thermostat for TD (code TD3714) and for TDR (code TD4209)

### Flail head

	TIL 100
Width (m)	1,00
Rotor speed (rpm)	3000
Blade tip speed (m/sec)	59
Flail head angle	190°
Weight (kg)	120

TIL100  
Direct drive



### Flails

#### TIL100

Articulated "Y" flails  
for: grass, bushes  
Ø max 2 cm



Code 0901049

n° 40



### Features:

- Flail head
- Totally independent hydraulic (gear pump and motor)
- FLOATING head system
- Mechanical breakaway
- Front guard for flail head with flaps
- Reversible rotor by cable
- Oil and Pto shaft